


C30742-66 Series

Silicon Photomultipliers with 6x6 mm² active area

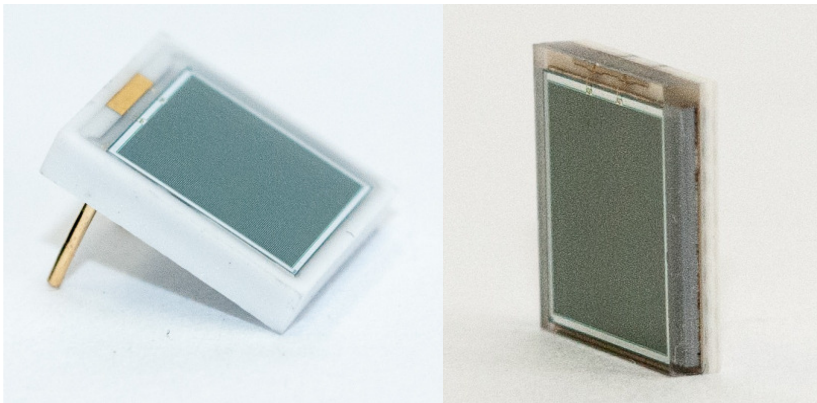

The Excelitas C30742-66 Series SiPM is offered in 2 standard package configurations: Leadless laminated carrier surface mount, and the two-lead ceramic mount.

Key Features

- Low timing resolution
- High gain at low bias voltage
- Low dark count rate
- High photon detection efficiency
- Low capacitance
- Excellent gain – temperature – voltage characteristics
- RoHS-compliant

Applications

- Positron Emission Tomography (PET)
- Analytical Detection
- High Energy Physics experiments
- Radiation Detection
- Fluorescence Detection

The Excelitas C30742-66 Series Silicon Photomultiplier is designed for photon detection in the 350 nm to 850 nm range. Its innovative design based on Excelitas' proprietary high-performance APD processes is optimized for low timing resolution, low dark count, low cross talk and high photon detection efficiency. This unique set of performance parameters makes the Excelitas SiPM especially advantageous for demanding high volume applications such as Positron Emission Tomography (PET), high energy physics experiments, analytical measurements and radiation detection.

The Excelitas C30742-66 SiPM is offered in 2 standard package configurations: two-lead ceramic mount and our patented leadless laminated carrier surface mount (XLLC, SMT, tile-able) allowing for easy handling and coupling to scintillating crystals such as L(Y)SO and LaBr₃.

Excelitas Technologies is committed to supplying the highest quality product to our customers. This specification sheet covers our standard products. Please contact us directly to discuss your custom requirements and how we can accommodate your special design, packaging, or testing needs.

C30742-66 Series

Silicon Photomultipliers

Table 1: Electrical Characteristics, at TA = 25 °C, typical V_{op}⁽¹⁾ - unless otherwise indicated

Parameter	Symbol	C30742-66-50-C ⁽²⁾			Unit
		Minimum	Typical	Maximum	
Active area	-		6x6		mm
# of microcells	-		14400		-
Microcell size	-		50		um
Breakdown Voltage	V _{bd}		95		V
Over Voltage ⁽¹⁾	ΔV		5	10	V
Spectral response range	λ		350-850		nm
Photon detection efficiency ⁽³⁾	PDE				%
@ 420nm			30		
@ 520nm			33		
@ 635nm			18		
Rise Time	T _r		800		ps
Dark count	DCR		5400	10800	Kcps
Dark count / mm ²			150	300	Kcps
Dark Current	I _d		2.8	5.6	uA
Terminal Capacitance	C _t		635		pF
Gain	M		1.5x10 ⁶		
Single photon timing resolution (FWHM) at 440nm	SPTR		400		ps
Temperature coefficient of V _{br}	T _c = ΔV/ΔT		90		mV/°C
Gain variation with over-voltage	ΔM/MΔV		1		%/50mV
Gain variation with temperature	ΔM/MΔT		1.8		%/°C

Note 1: Typical recommended operating voltage is V_{op} = V_{bd} +5V

Note 2: See Table 2 for part number system of this SiPM series.

Note 3: True PDE value on potted device. After pulse and crosstalk are not included.

Table 2: Ordering Guide

Excelitas C30742-66 Series SiPM	50 x 50 μm ² microcell size
Ceramic Package with Pins	C30742-66-050-C
XLLC (Leadless Laminate Carrier)	C30742-66-050-X

C30742-66 Series
Silicon Photomultipliers

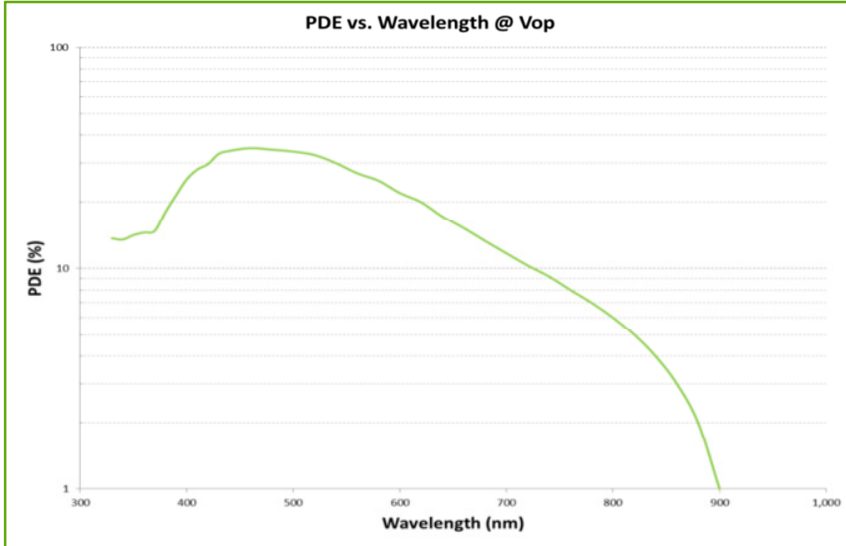


Figure 1:
Photon Detection Efficiency (PDE) vs. Wavelength

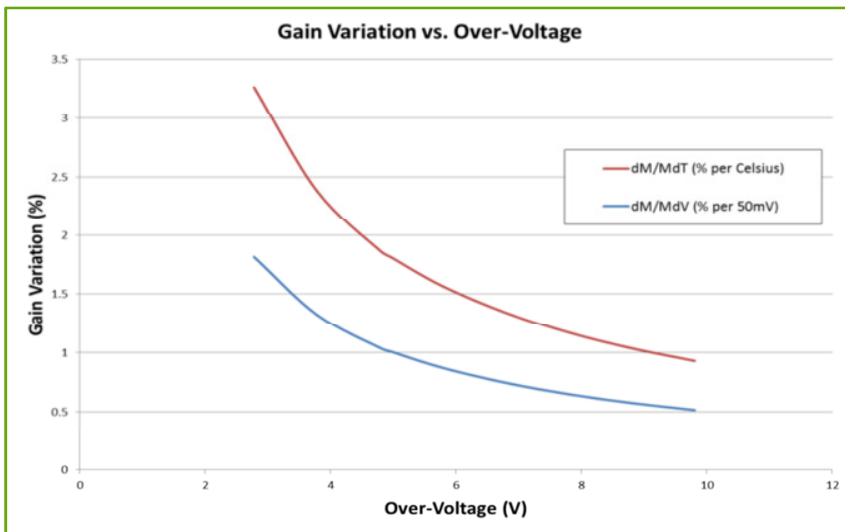


Figure 2:
Gain variation vs. over-voltage

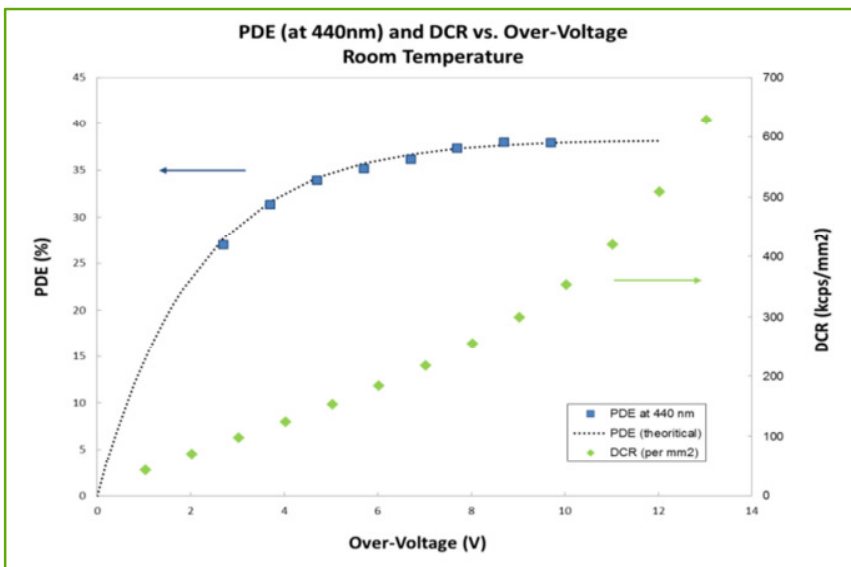


Figure 3:
PDE and Dark Count vs. over-voltage at room temperature

C30742-66 Series Silicon Photomultipliers

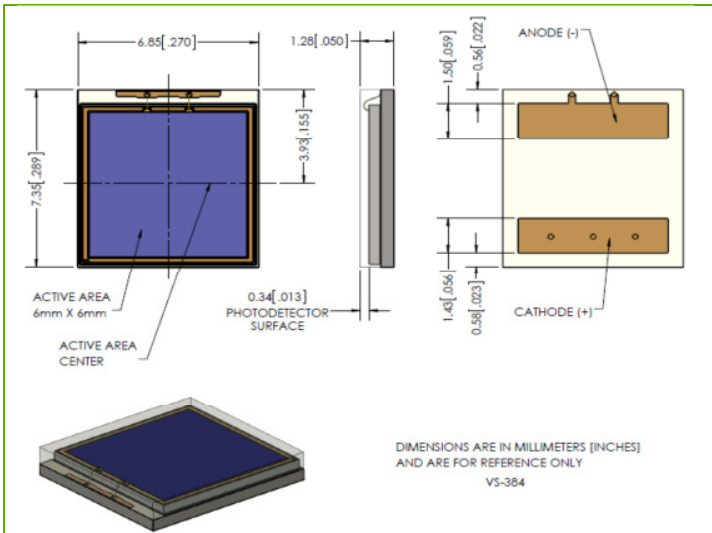


Figure 4:
Leadless laminated carrier surface mount (XLLC)
dimensions, Part#: C30742-66-050-X

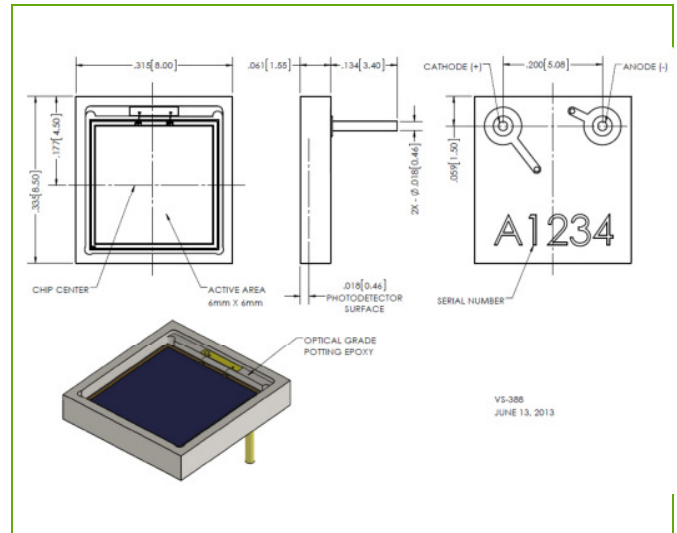


Figure 5:
Two-lead ceramic carrier dimensions,
Part#: C30742-66-050-C

Excelitas Technologies' Silicon Photomultiplier development program is supported by financial contribution of the Government of Canada. Its laminated packaging is held under United States Patent No. 8,431,951.

About Excelitas Technologies

Excelitas Technologies is a global technology leader focused on delivering innovative, customized solutions to meet the lighting, detection and other high-performance technology needs of OEM customers. From analytical instrumentation to clinical diagnostics, medical, industrial, safety and security, and aerospace and defense applications, Excelitas Technologies is committed to enabling our customers' success in their specialty end-markets. Excelitas Technologies has approximately 3,000 employees in North America, Europe and Asia, serving customers across the world.

Excelitas Technologies
22001 Dumberry Road
Vaudreuil-Dorion, Quebec
Canada J7V 8P7
Telephone: (+1) 450.424.3300
Toll-free: (+1) 800.775.6786
Fax: (+1) 450.424.3345
detection.na@excelitas.com

Excelitas Technologies
GmbH & Co. KG
Wenzel-Jaksch-Str. 31
D-65199 Wiesbaden
Germany
Telephone: (+49) 611 492 430
Fax: (+49) 611 492 165
detection.europe@excelitas.com

Excelitas Technologies Singapore, Pte. Ltd.
1 Fusionopolis Walk, #11-02
Solaris South Tower
Singapore 138628
Telephone: (+65) 6775 2022 (Main)
Telephone: (+65) 6770 4366 (Cust. Svc.)
Fax: (+65) 6778 1752
detection.asia@excelitas.com

EXCELITAS[®]
TECHNOLOGIES

For a complete listing of our global offices, visit www.excelitas.com/locations

© 2013 Excelitas Technologies Corp. All rights reserved. The Excelitas logo and design are registered trademarks of Excelitas Technologies Corp. All other trademarks not owned by Excelitas Technologies or its subsidiaries that are depicted herein are the property of their respective owners. Excelitas reserves the right to change this document at any time without notice and disclaims liability for editorial, pictorial or typographical errors.