

## SPCM-NIR

# NIR-Optimized Single Photon Counting Module



Excelitas Technologies' SPCM-NIR is a Single Photon Counting Module specifically selected and performance-optimized for the near infra-red wavelength spectrum.

The SPCM-NIR uses a specially selected SLiK silicon avalanche photodiode with peak single photon detection efficiency typically better than 73% while maintaining uniformity over a 180  $\mu\text{m}$  diameter active area. This module achieves enhanced red and NIR sensitivity while maintaining such other performance parameters of the standard SPCM-AQRH, such as outstanding uniformity, overload protection, temperature stability and linearity

This NIR spectrum enhanced device is designed to support long range LIDAR, quantum communication and microscopy, as well as many other applications.

Excelitas' series of photon counting modules are designed and built to be fully compliant with the European Union Directive 2011/65/EU – Restriction of Hazardous Substances in Electrical and Electronic equipment (RoHS).

### Key Features

- Peak photon detection efficiency (PDE) @ 700 nm: 73% typical
- Active area: 180  $\mu\text{m}$
- Gated output
- Single +5 V supply
- RoHS-compliant
- Linearity over high count rate

### Applications

- LIDAR
- Quantum Cryptography
- Photon correlation spectroscopy
- Astronomical observation
- Optical range finding
- Adaptive optics
- Ultra-sensitive fluorescence
- Particle sizing
- Microscopy and imaging

## SPCM-NIR Series

# NIR-Optimized Single Photon Counting Module

**Table 1. Absolute Maximum Ratings**

Supply voltage <sup>(1)</sup>	5.5 V
Maximum count rate	Maximum count rate can be sustained if case temperature is maintained within limit specified limits.
Peak light intensity	10 <sup>4</sup> photons per pulse and pulse width < 1 ns
Case temperature <sup>(3)</sup>	-20°C/+70°C storage, +5°C /+70°C operating

**Table 2. Specifications of SPCM-NIR, @ 22 °C, all models; unless otherwise indicated <sup>(1)</sup>**

Parameter	Min	Typ	Max	Unit
Active area (diameter) at minimum PDE	170	180		µm
Photon detection efficiency (PDE) (without FC adaptor) at <sup>(2)</sup> :				
780 nm	64	70		%
800 nm	60	65		%
850 nm	54	58		%
900 nm	40	45		%
Dark Count				
SPCM-NIR-10			1500	Counts / second
SPCM-NIR-11			1000	
SPCM-NIR-12			500	
SPCM-NIR-13			250	
SPCM-NIR-14			100	
Single photon timing resolution (at 825 nm) <sup>(3)</sup>		350		ps
Dead time (count rate below 5M/c) Other values can be factory set		20	40	ns
Output count rate before saturation	12	40		Mc/s
Linearity correction factor at				
200 Kc/s		1		
1 Mc/s		1.02		
5 Mc/s		1.16		
10 Mc/s		1.40		
20 Mc/s		2.35		
25 Mc/s		3.32		
Afterpulsing probability		1.0	3.0	%


(1) For other performance characteristics, refer to Operating Instructions, product notes and specifications listed on the standard SPCM-NIR data sheet. Refer to other numeric notation on the standard SPCM-NIR data sheet.

(2) Minimum photon detection efficiency (PDE) measured and recorded at specific wavelength, refer to Table 3, Ordering Guide.


(3) For timing resolution enhanced module, consult Product Brief for SPCM-AQRH-TR series.

# NIR-Optimized Single Photon Counting Module

**Table 3. Ordering Guide**

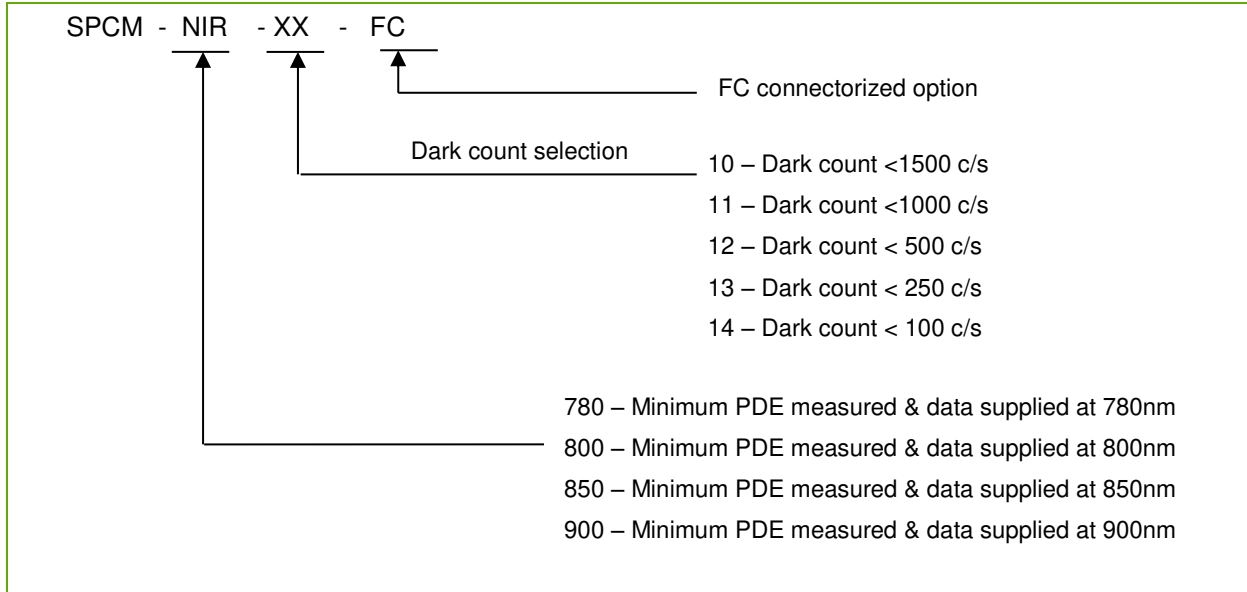

**Figure 1. Typical Photon Detection Efficiency (PDE) vs. Wavelength**

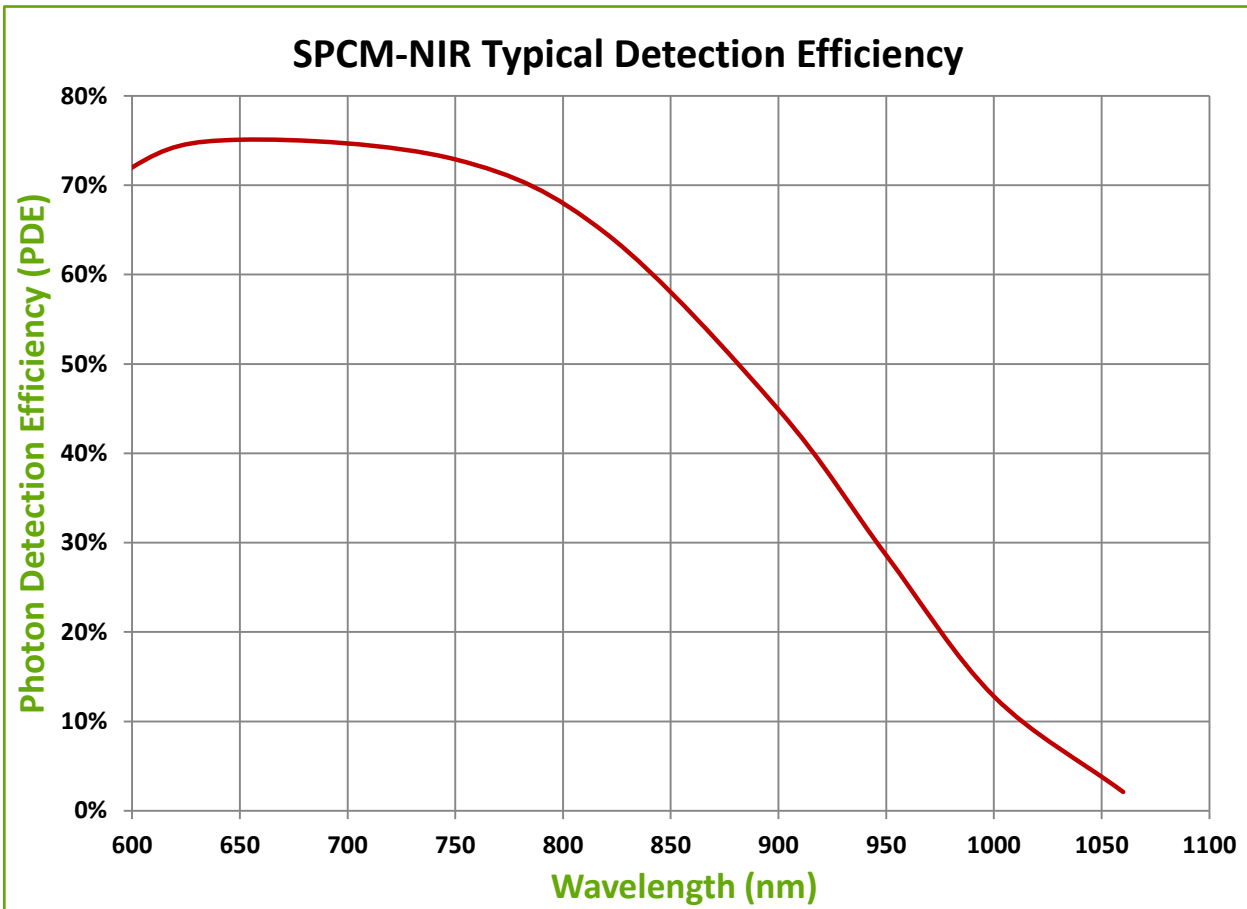

## SPCM-NIR Series

# NIR-Optimized Single Photon Counting Module

### Warranty

A standard 12-month warranty following shipment applies. Any warranty is null and void if the module case has been opened. Warranty is null and void if the module input exceeds 5.5V or the polarity of the +5V supply is reversed.

### Individual Module Test Data

Each module is supplied with test data indicating the module's actual dark count, dead time, pulse width, photon detection efficiency at the chosen wavelength per Ordering Guide, and linearity correction factor.

### RoHS Compliance

This series of APD module is designed and built to be fully compliant with the European Union Directive 2011/65/EU – Restriction of the use of certain Hazardous Substances (RoHS) in Electrical and Electronic equipment.



### About Excelitas Technologies

Excelitas Technologies is a global technology leader focused on delivering innovative, customized solutions to meet the detection, lighting, and other high-performance technology needs of OEM customers.

From analytical instrumentation to clinical diagnostics, medical, industrial, safety and security, and aerospace and defense applications, Excelitas Technologies is committed to enabling our customers' success in their end-markets. Excelitas Technologies has approximately 5,000 employees in North America, Europe and Asia, serving customers across the world.

**Excelitas Technologies**  
22001 Dumberry Road  
Vaudreuil-Dorion, Quebec  
Canada J7V 8P7  
Telephone: (+1) 450.424.3300  
Toll-free: (+1) 800.775.6786  
Fax: (+1) 450.424.3345  
[detection.na@excelitas.com](mailto:detection.na@excelitas.com)

**Excelitas Technologies  
GmbH & Co. KG**  
Wenzel-Jaksch-Str. 31  
D-65199 Wiesbaden  
Germany  
Telephone: (+49) 611 492 430  
Fax: (+49) 611 492 165  
[detection.europe@excelitas.com](mailto:detection.europe@excelitas.com)

**Excelitas Technologies Singapore, Pte. Ltd.**  
8 Tractor Road  
Singapore 627969  
Telephone: (+65) 6775 2022 (Main number)  
Telephone: (+65) 6770 4366 (Customer  
Service)  
Fax: (+65) 6778-1752  
[detection.asia@excelitas.com](mailto:detection.asia@excelitas.com)



For a complete listing of our global offices, visit [www.excelitas.com/locations](http://www.excelitas.com/locations)

© 2014 Excelitas Technologies Corp. All rights reserved. The Excelitas logo and design are registered trademarks of Excelitas Technologies Corp. All other trademarks not owned by Excelitas Technologies or its subsidiaries that are depicted herein are the property of their respective owners. Excelitas reserves the right to change this document at any time without notice and disclaims liability for editorial, pictorial or typographical errors.