


SMD 905nm 1x4 Pulsed Laser Diode Array

High Power Laser-Diode Family for LiDAR and Range Finding

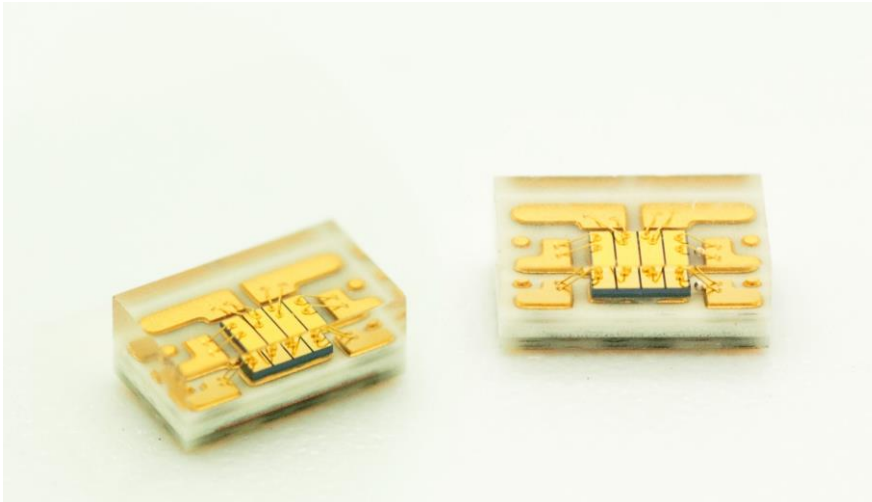

Near field profile, each channel

Excelitas' pulsed semiconductor laser array produces very high peak optical pulses centered at a wavelength of 905 nm.

Excelitas Technologies' pulsed semiconductor laser array module is a monolithic array of four individual 905nm InGaAs/GaAs strained quantum well lasers which can be driven individually addressable with no electronic or optical crosstalk within the array, or with a common drive, where the output from the channels will combine to appear as one large laser when fired together. Each laser is a structure of three single cavities grown on a GaAs substrate and connected in series by a low resistance connector, which is a tunnel junction. Each laser has current injection width of 270 μm and height of 10 μm .

The laser diode is mounted on a leadless laminate carrier (LLC) substrate with excellent thermal management. This is intended for both surface mount applications and hybrid integration. The encapsulate material is a molded epoxy resin for high-volume manufacturing.

The package design and assembly processing techniques are such that the die positioning is well controlled to the reference surfaces. With all four channels being part of the same monolithic chip growth, positioning and alignment channel-to-channel are controlled by the mask design and lithographic processes, and are thus accurate to micron-level tolerances.

Quantum well laser design offers rise and fall times of < 1 ns however the drive circuit layout and package inductance play a dominant role and should be designed accordingly.

Key Features

- Concentrated emitting source size for high power into aperture
- Multi-Epi Quantum well structure
- Can sustain large reverse voltage levels of up to 35V for 1 μs
- Excellent power stability with temperature
- RoHS compliant

Applications

- LiDAR
- Adaptive cruise control
- Autonomous Vehicles
- Range finding
- Safety light curtains
- Laser therapy

Surface Mount 905 nm Pulsed Semiconductor Laser 4-channel Array

High Power Laser-Diode Family for LiDAR and Range Finding

Table 1: Maximum Ratings

Parameter	Symbol	Minimum	Maximum	Units
Peak Reverse Voltage	V_{RM}		35	V
Pulse Duration	t_W	5	100	ns
Duty Factor	du		0.1	%
Storage Temperature	T_S	-40	105	°C
Operating Temperature	T_{OP}	-40	85	°C
Soldering for 5 Seconds			260	°C

Table 2: General Electro-optical Specifications at 23°C

Parameter	Symbol	Minimum	Typical	Maximum	Units
Centre Wavelength of Spectral Envelope	λ_c	895	905	925	nm
Spectral Bandwidth at 50% Intensity Points	$\Delta\lambda$		5		nm
Wavelength Temperature Coefficient	$\Delta T/\Delta\lambda$		0.25		nm/°C
Beam Spread (50% Intensity Points) Parallel to Junction Plane	$\theta_{ }$		10		degrees
Beam Spread (50% Intensity Points) Perpendicular to Junction Plane	θ_{\perp}		25		degrees

Table 3: Part Numbering

SMD 905nm 1x4 Pulsed Laser Diode Array	TPGAD1S11A-4A
--	---------------

Table 4: Electro-optical Specifications at 23°C

Test Conditions: 50ns, 1 kHz

Characteristics (per channel)	Symbol	Minimum	Typical	Maximum	Units
Emitting area			270 x 10		μm
Pitch between emitting stripes – fast axis		4	4.7	5	μm
Pitch between adjacent lasers			315		μm
Drive Current	I_{FM}		30		A
Optical Power Output at I_{FM}	P_O	70	75		W
Forward Voltage at i_{FM}^1	V_F		13.5		V
Threshold Current	I_{TH}		1.75		A
Series Resistance	R_s		0.23		Ω
Bandgap Voltage Drop	V_g		6.5		V

Note 1: As estimated by $V_F = R_S i_F + V_g$.

Surface Mount 905 nm Pulsed Semiconductor Laser 4-channel Array

High Power Laser-Diode Family for LiDAR and Range Finding

Electro-Optical Characteristics

Figure 1:

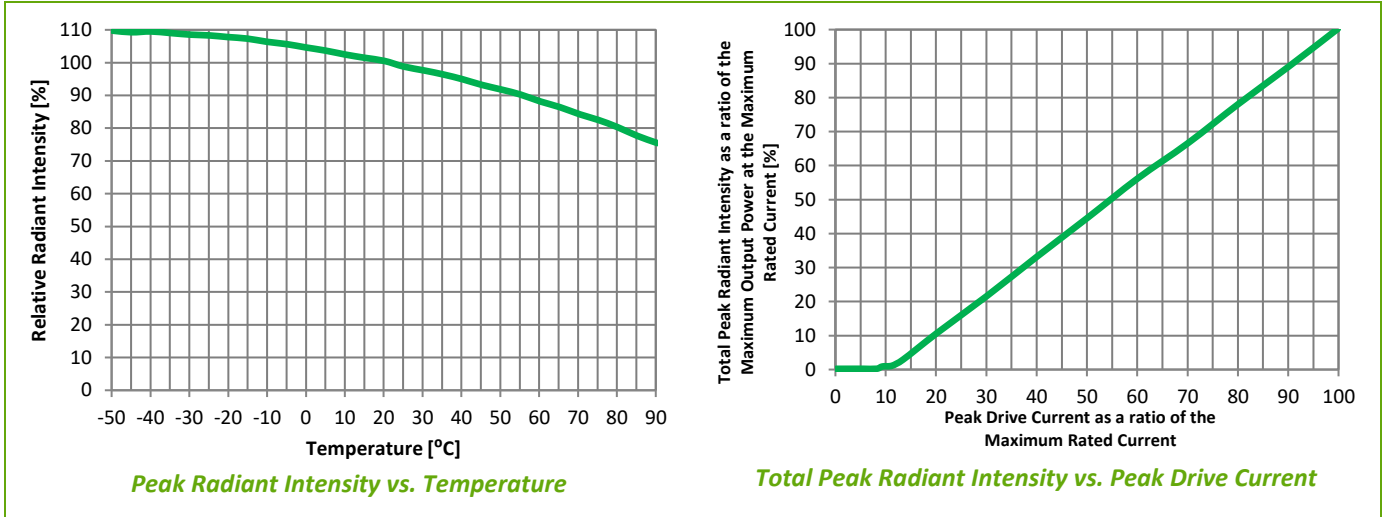


Figure 2:


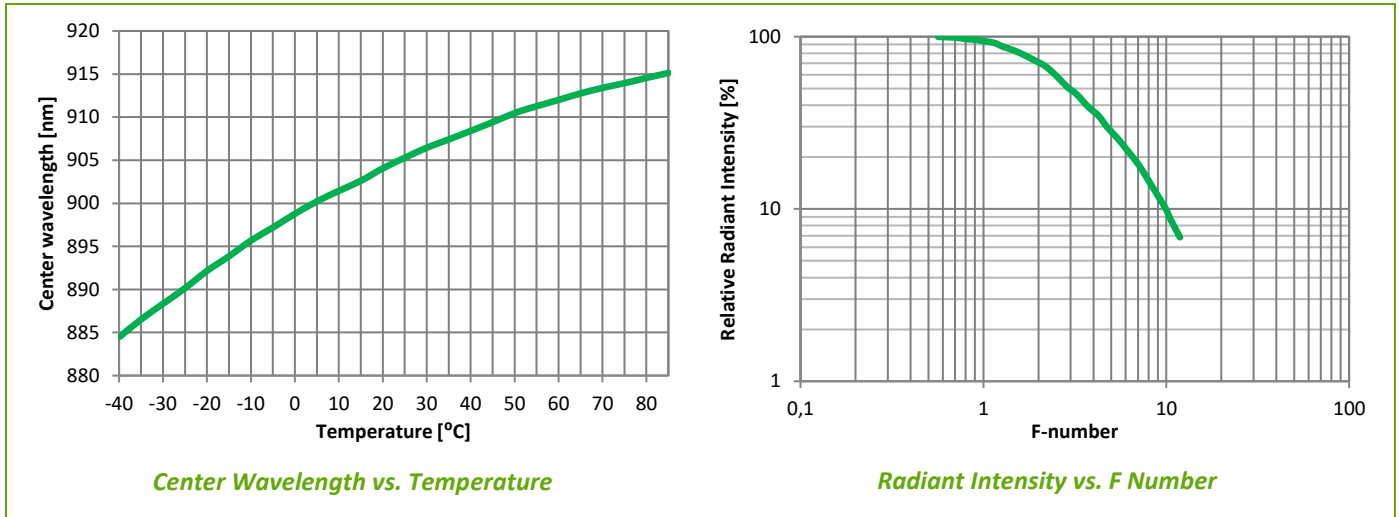


Figure 3:

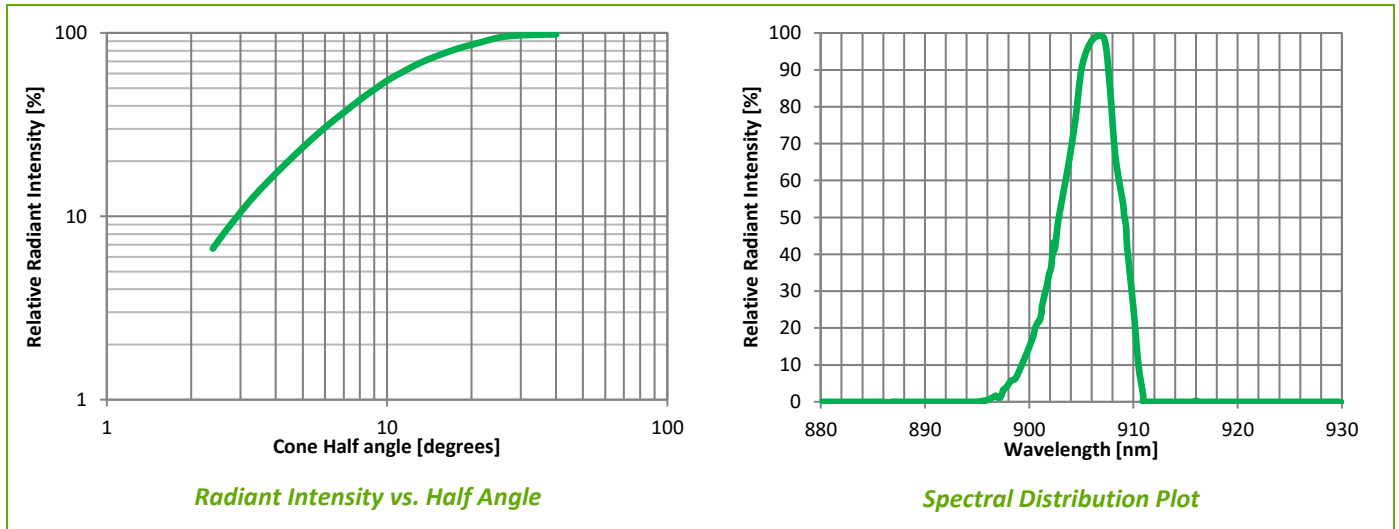

Surface Mount 905 nm Pulsed Semiconductor Laser 4-channel Array

High Power Laser-Diode Family for LiDAR and Range Finding

Figure 4:


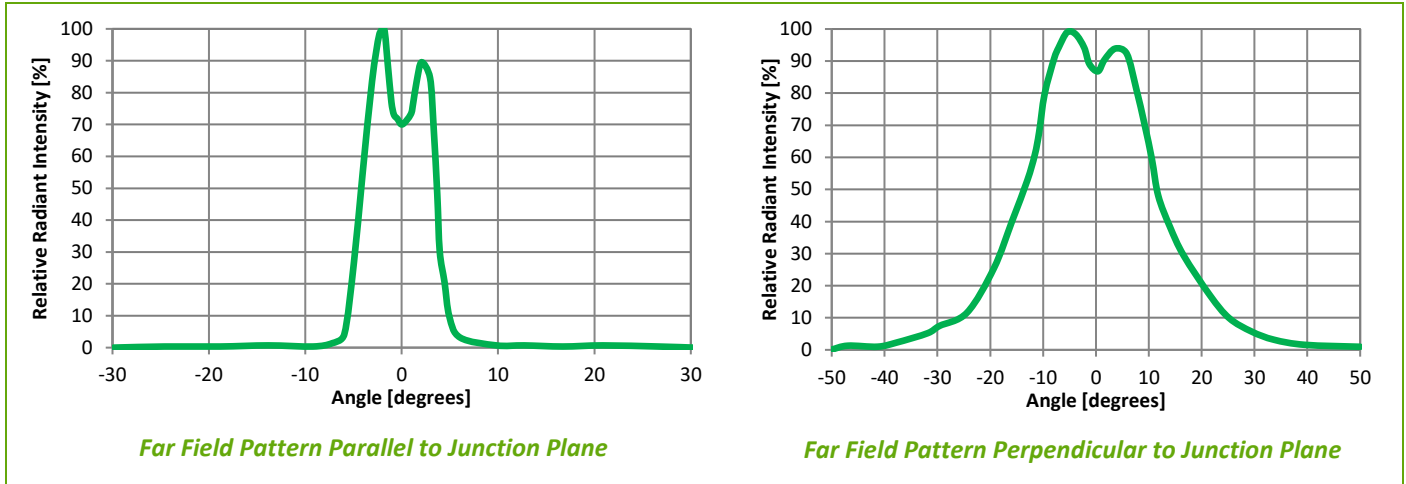



Figure 5: Package Mechanical Dimensions

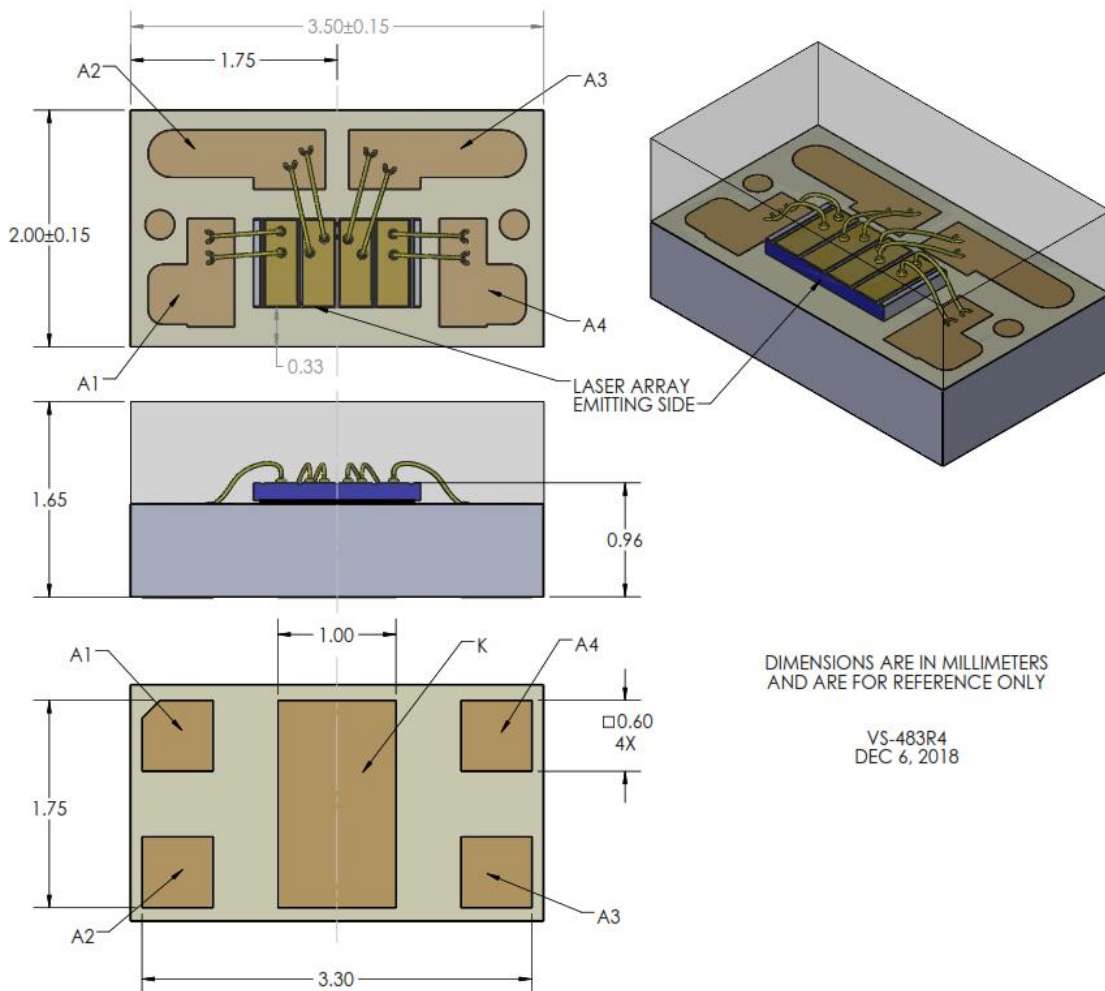

Surface Mount 905 nm Pulsed Semiconductor Laser 4-channel Array

High Power Laser-Diode Family for LiDAR and Range Finding


Figure 6: Laser Emitting Area Typical Dimensions

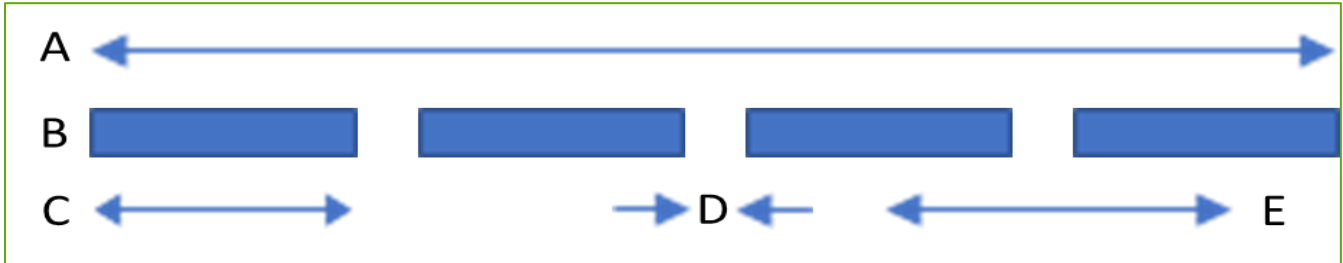

Characteristic	Label	Value
Array length	A	1215
Emitting height	B	10
Emitting width	C	270
Space between channels	D	45
Channel Pitch	E	315

All dimensions in μm

Figure 7: Recommended typical solder reflow profile (specific reflow soldering parameters depend on solder alloy used).

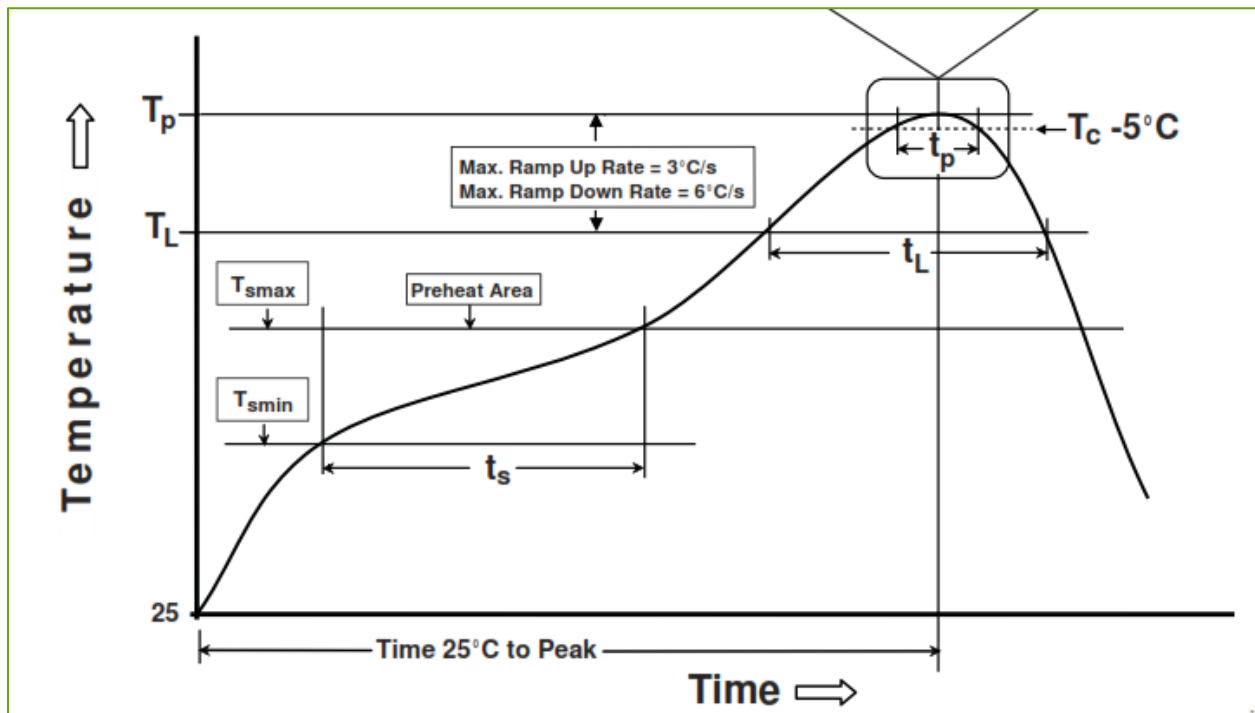

Surface Mount 905 nm Pulsed Semiconductor Laser 4-channel Array

High Power Laser-Diode Family for LiDAR and Range Finding

Profile Feature	Symbol	Value	Units
Pre-Heat			
Temperature min	$T_{S_{min}}$	150	°C
Temperature max	$T_{S_{max}}$	200	°C
Time ($T_{S_{min}}$ to $T_{S_{max}}$)	t_s	75	seconds
Temperature maintained above	T_L	217	°C
Time maintained above	t_L	65	seconds
Peak Temperature	T_p	244	°C
Time within 5°C of the actual peak temperature (T_p)		25	seconds
Ramp down rate		2	°C/second
Time 25°C to Peak Temperature		4	Minutes

MSL Rating

The final MSL testing on this device is currently pending. Excelitas highly recommends to bake out units according to IPC/JEDEC-J-STD-033C immediately before reflow soldering. Recommended conditions are 125 °C for 48 hours. For complete details refer to the IPC/JEDEC- J-STD-033C specification.

For Your Safety: Laser Radiation

Under operation, these devices produce invisible electromagnetic radiation that may be harmful to the human eye. To ensure that these laser components meet the requirements of Class IIIb laser products, they must not be operated outside their maximum ratings. Power supplies used with these components must be such that the maximum peak forward current cannot be exceeded. It is the responsibility of the user incorporating a laser into a system to certify the Class of use and ensure that it meets the requirements of the ANSI or appropriate authority.

Further details may be obtained in the following publications:

- 21CFR 1040.10** – “Performance Standards for Light Emitting Products (Laser Products)”
- ANSI Z136.1** – “American National Standard for Safe use of Lasers”
- IEC 60825-1** – “Safety of Laser Products”

RoHS Compliance

This series of laser diodes are designed and built to be fully compliant with the European Union Directive 2011/65/EU – Restriction of the use of certain Hazardous Substances in Electrical and Electronic equipment.



Surface Mount 905 nm Pulsed Semiconductor Laser 4-channel Array

High Power Laser-Diode Family for LiDAR and Range Finding

Warranty

A standard 12-month warranty following shipment applies.

About Excelitas Technologies

Excelitas Technologies is a global technology leader focused on delivering innovative, customized solutions to meet the lighting, detection and other high-performance technology needs of OEM customers.

Excelitas has a long and rich history of serving our OEM customer base with optoelectronic sensors and modules for more than 45 years beginning with PerkinElmer, EG&G, and RCA. The constant throughout has been our innovation and commitment to delivering the highest quality solutions to our customers worldwide.

From aerospace and defense to analytical instrumentation, clinical diagnostics, medical, industrial, and safety and security applications, Excelitas Technologies is committed to enabling our customers' success in their specialty end-markets. Excelitas Technologies has approximately 5,000 employees in North America, Europe and Asia, serving customers across the world.

Excelitas Technologies
22001 Dumberry Road
Vaudreuil-Dorion, Quebec
Canada J7V 8P7
Telephone: (+1) 450.424.3300
Toll-free: (+1) 800.775.6786
Fax: (+1) 450.424.3345
detection.na@excelitas.com

Excelitas Technologies
GmbH & Co. KG
Wenzel-Jaksch-Str. 31
D-65199 Wiesbaden
Germany
Telephone: (+49) 611 492 430
Fax: (+49) 611 492 165
detection.europe@excelitas.com

Excelitas Technologies Singapore, Pte. Ltd.
8 Tractor Road
Singapore 627969
Telephone: (+65) 6775 2022 (Main number)
Telephone: (+65) 6770 4366 (Customer Service)
Fax: (+65) 6778-1752
detection.asia@excelitas.com



For a complete listing of our global offices, visit www.excelitas.com/locations

© 2017 Excelitas Technologies Corp. All rights reserved. The Excelitas logo and design are registered trademarks of Excelitas Technologies Corp. All other trademarks not owned by Excelitas Technologies or its subsidiaries that are depicted herein are the property of their respective owners. Excelitas reserves the right to change this document at any time without notice and disclaims liability for editorial, pictorial or typographical errors.